



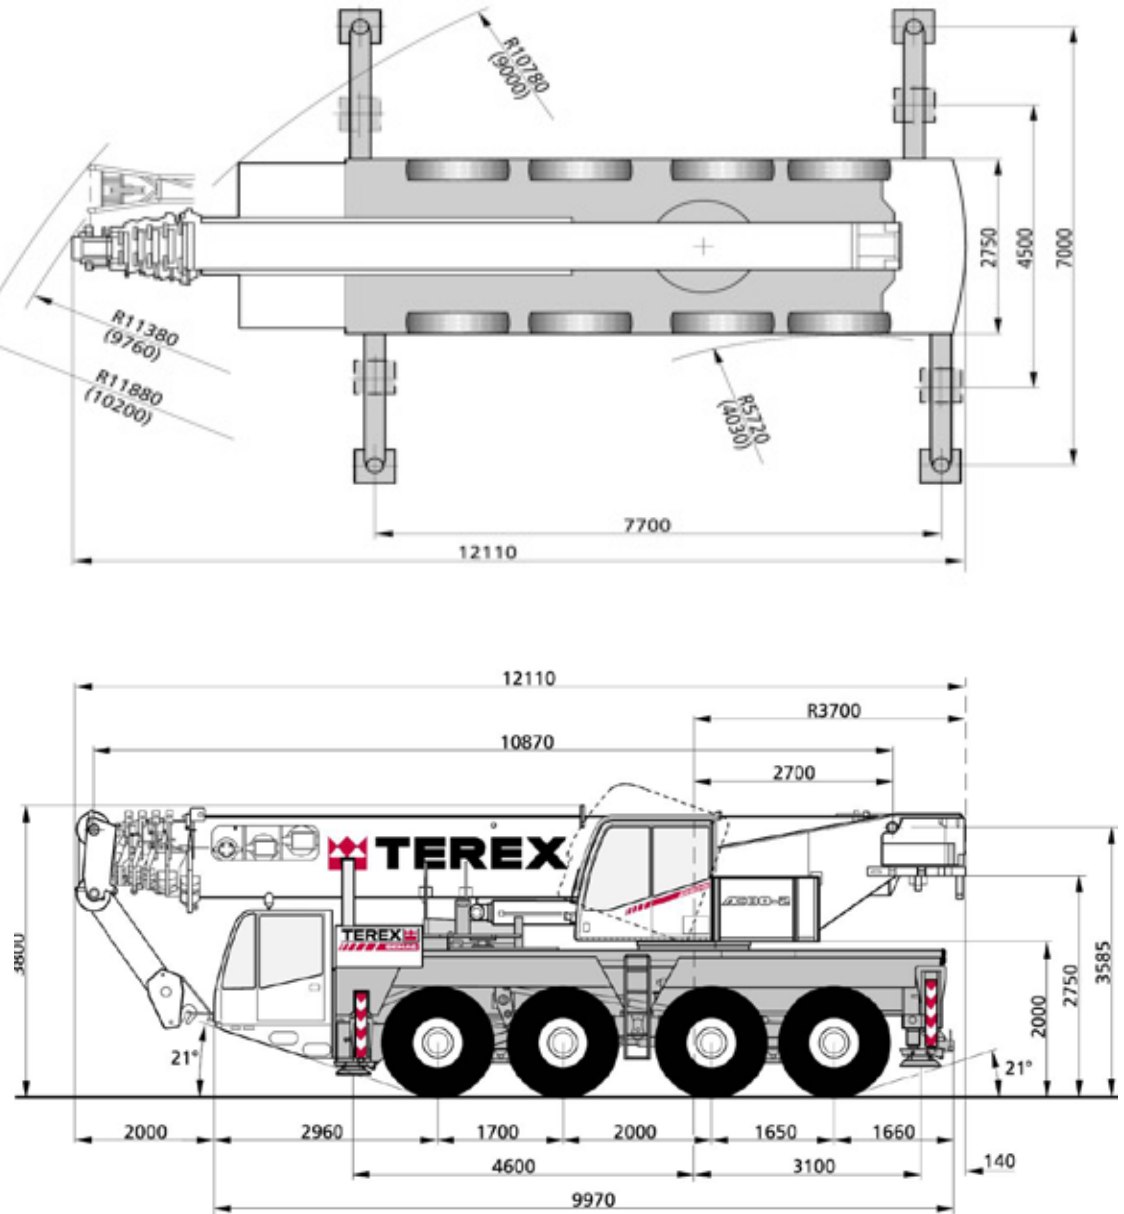

TEREX DEMAG AC 80-2
80-T

TEREX AC-80-2

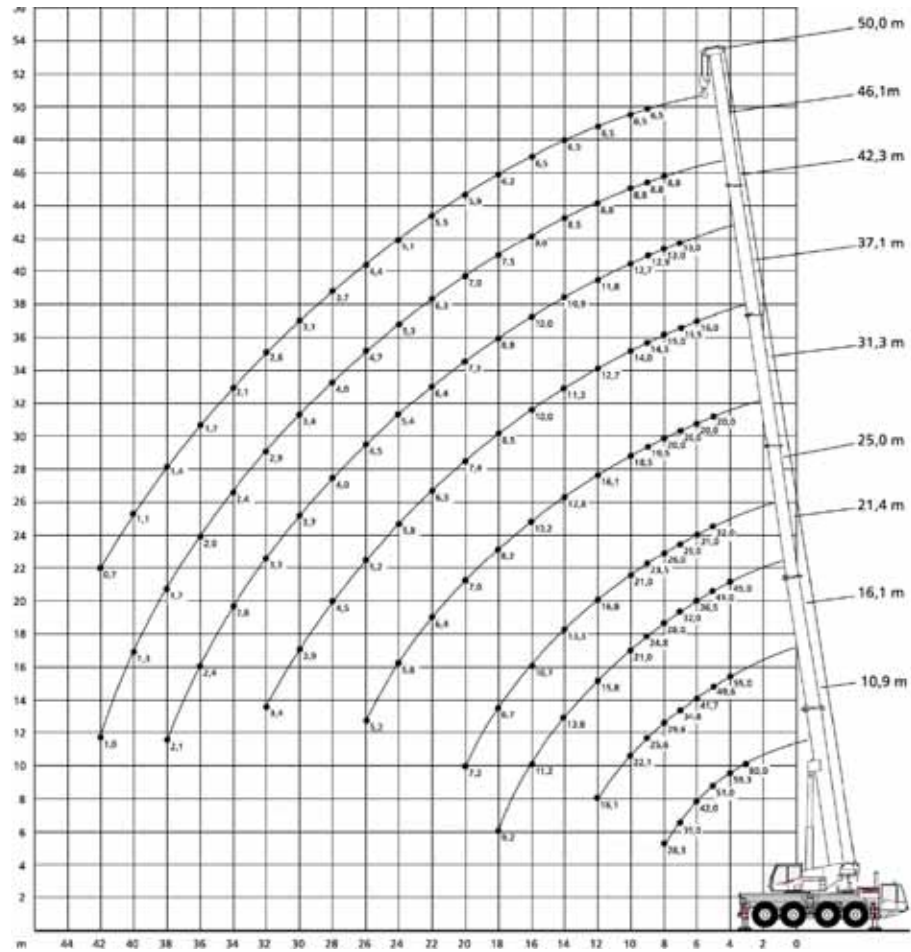

DIN - 75%

ZWENKEN MET STEPELS 360°

B \ A	10,9 m	16,1 m	21,4 m	25,0 m	31,3 m	37,1 m	42,3 m	46,1 m	50,0 m
3,0 m	80,0*								
3,0 m	70,0								
3,5 m	64,4	55,0							
4,0 m	59,3	55,0	45,0						
4,5 m	54,9	52,9	43,0	32,0					
5,0 m	51,0	49,6	41,0	32,0	20,0				
6,0 m	42,0	41,7	36,5	31,0	20,0	16,0			
7,0 m	35,0	34,8	32,0	29,0	20,0	15,5	13,0		
8,0 m	28,3	29,6	28,0	26,0	20,0	15,0	13,0	8,8	
9,0 m		25,6	24,8	23,5	19,5	14,5	12,9	8,8	6,5
10,0 m		22,1	21,0	21,0	18,5	14,0	12,7	8,8	6,5
12,0 m		16,1	15,8	16,8	16,1	12,7	11,8	8,8	6,5
14,0 m			13,8	13,3	12,8	11,3	10,9	8,5	6,5
16,0 m			11,2	10,7	10,2	10,0	10,0	8,0	6,5
18,0 m			9,2	8,7	8,2	8,5	8,8	7,5	6,2
20,0 m				7,2	7,0	7,4	7,3	7,0	5,9
22,0 m					6,4	6,3	6,4	6,3	5,5
24,0 m					5,8	5,8	5,4	5,3	5,1
26,0 m					5,2	5,2	4,5	4,7	4,4
28,0 m						4,5	4,0	4,0	3,7
30,0 m						3,9	3,7	3,4	3,1
32,0 m						3,4	3,3	2,9	2,6
34,0 m							2,8	2,4	2,1
36,0 m							2,4	2,0	1,7
38,0 m							2,1	1,7	1,4
40,0 m								1,3	1,1
42,0 m								1,0	0,7

C		17,6 m op aanvraag		
B \ D	0°	20°	40°	
12,0 m				
14,0 m	1,2			
16,0 m	1,2			
18,0 m	1,2			
20,0 m	1,2	1,1		
22,0 m	1,1	1,1		
24,0 m	1,1	1,1	1,0	
26,0 m	1,0	1,1	1,0	
28,0 m	1,0	1,0	1,0	
30,0 m	1,0	1,0	1,0	
32,0 m	1,0	1,0	1,0	
36,0 m	0,9	0,9	0,9	
38,0 m	0,9	0,9	0,9	
40,0 m	0,8	0,9	0,9	
42,0 m	0,8	0,9	0,9	
44,0 m	0,7	0,8	0,9	
46,0 m	0,7	0,8	0,8	
48,0 m		0,8	0,8	
50,0 m		0,6		

A: Mastlengte
B: Sprei in m
C: Jiblengte
D: Jibhoek

Stempelbreedte:



Let op! Bij de te hijsen last moet(en) het hijsblok en de hulpgereedschap(pen) meegeteld worden.